

**MODEL MT-215 TTL  
SINGLE HEAD, 3-TRACK,  
INSERTION READER  
TECHNICAL REFERENCE MANUAL**

**Manual Part Number 99875157 Rev 5**

**MAY 2003**

**MAGTEK<sup>®</sup>**

**REGISTERED TO ISO 9001:2000**

1710 Apollo Court  
Seal Beach, CA 90740  
Phone: (562) 546-6400  
FAX: (562) 546-6301  
Technical Support: (651) 415-6800  
*www.magtek.com*

Information in this document is subject to change without notice. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of MagTek, Inc.

MagTek is a registered trademark of MagTek, Inc.

### REVISIONS

Rev Number	Date	Notes
1	08 Dec 99	Initial Release
2	01 Jan 00	Front matter; Changed copyright date; Changed warranty from 90 days to one year;
3	16 Mar 01	Front Matter: Added Address for Warranty RMA. Changed Agency approvals to Class B. Section 2: Fig 2-1, Added to Back View "of Bezel". Added Appendix A, Bezel Design.
4	07 Aug 02	Sec 1, Related Documents: Added P/N 99875148. Specs: Added Output Signal Levels. Sec 2: Added text to Card Orientation regarding reverse read; Added Fig 2-3 and relevant text for timing.
5	21 May 03	Front Matter: added ISO line to logo, changed Tech Support phone number, added new warranty statement

## **LIMITED WARRANTY**

MagTek warrants that the products sold to Reseller pursuant to this Agreement will perform in accordance with MagTek's published specifications. This warranty shall be provided only for a period of one year from the date of the shipment of the product from MagTek (the "Warranty Period"). This warranty shall apply only to the original purchaser unless the buyer is authorized by MagTek to resell the products, in which event, this warranty shall apply only to the first repurchase.

During the Warranty Period, should this product fail to conform to MagTek's specifications, MagTek will, at its option, repair or replace this product at no additional charge except as set forth below. Repair parts and replacement products will be furnished on an exchange basis and will be either reconditioned or new. All replaced parts and products become the property of MagTek. This limited warranty does not include service to repair damage to the product resulting from accident, disaster, unreasonable use, misuse, abuse, customer's negligence, Reseller's negligence, or non-MagTek modification of the product. MagTek reserves the right to examine the alleged defective goods to determine whether the warranty is applicable.

Without limiting the generality of the foregoing, MagTek specifically disclaims any liability or warranty for goods resold in other than MagTek's original packages, and for goods modified, altered, or treated by customers.

Service may be obtained by delivering the product during the warranty period to MagTek (1710 Apollo Court, Seal Beach, CA 90740). If this product is delivered by mail or by an equivalent shipping carrier, the customer agrees to insure the product or assume the risk of loss or damage in transit, to prepay shipping charges to the warranty service location and to use the original shipping container or equivalent. MagTek will return the product, prepaid, via a three (3) day shipping service. A Return Material Authorization (RMA) number must accompany all returns.

**MAGTEK MAKES NO OTHER WARRANTY, EXPRESS OR IMPLIED, AND MAGTEK DISCLAIMS ANY WARRANTY OF ANY OTHER KIND, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.**

**EACH PURCHASER UNDERSTANDS THAT THE MAGTEK PRODUCT IS OFFERED AS IS. IF THIS PRODUCT DOES NOT CONFORM TO MAGTEK'S SPECIFICATIONS, THE SOLE REMEDY SHALL BE REPAIR OR REPLACEMENT AS PROVIDED ABOVE. MAGTEK'S LIABILITY, IF ANY, TO RESELLER OR TO RESELLER'S CUSTOMERS, SHALL IN NO EVENT EXCEED THE TOTAL AMOUNT PAID TO MAGTEK BY RESELLER UNDER THIS AGREEMENT. IN NO EVENT WILL MAGTEK BE LIABLE TO THE RESELLER OR THE RESELLER'S CUSTOMER FOR ANY DAMAGES, INCLUDING ANY LOST PROFITS, LOST SAVINGS OR OTHER INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OF OR INABILITY TO USE SUCH PRODUCT, EVEN IF MAGTEK HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, OR FOR ANY CLAIM BY ANY OTHER PARTY.**

### **LIMITATION ON LIABILITY**

**EXCEPT AS PROVIDED IN THE SECTIONS RELATING TO MAGTEK'S LIMITED WARRANTY, MAGTEK'S LIABILITY UNDER THIS AGREEMENT IS LIMITED TO THE CONTRACT PRICE OF THE PRODUCTS.**

**MAGTEK MAKES NO OTHER WARRANTIES WITH RESPECT TO THE PRODUCTS, EXPRESSED OR IMPLIED, EXCEPT AS MAY BE STATED IN THIS AGREEMENT, AND MAGTEK DISCLAIMS ANY IMPLIED WARRANTY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.**

**MAGTEK SHALL NOT BE LIABLE FOR CONTINGENT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES TO PERSONS OR PROPERTY. MAGTEK FURTHER LIMITS ITS LIABILITY OF ANY KIND WITH RESPECT TO THE PRODUCTS, INCLUDING ANY NEGLIGENCE ON ITS PART, TO THE CONTRACT PRICE FOR THE GOODS.**

**MAGTEK'S SOLE LIABILITY AND BUYER'S EXCLUSIVE REMEDIES ARE STATED IN THIS SECTION AND IN THE SECTION RELATING TO MAGTEK'S LIMITED WARRANTY.**

### **FCC WARNING STATEMENT**

This equipment has been tested and found to comply with the limits for Class B digital device, pursuant to Part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

### **FCC COMPLIANCE STATEMENT**

This device complies with Part 15 Of The FCC Rules. Operation of this device is subject to the following two conditions: (1) This device may not cause harmful interference. And (2) This device must accept any interference received, including interference that may cause undesired operation.

### **CANADIAN DOC STATEMENT**

This digital apparatus does not exceed the Class B limits for radio noise for digital apparatus set out in the Radio Interference Regulations of the Canadian Department of Communications.

Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la classe B prescrites dans le Règlement sur le brouillage radioélectrique édicté par le ministère des Communications du Canada.

### **CE STANDARDS**

Testing for compliance to CE requirements was performed by an independent laboratory. This equipment has been tested and demonstrated compliance to current European Union Directive 89/336/EEC for Class B disturbance level.

### **UL/CSA**

This product is recognized per Underwriter Laboratories and Canadian Underwriter Laboratories 1950.

## TABLE OF CONTENTS


<b>SECTION 1. FEATURES AND SPECIFICATIONS</b> .....	<b>1</b>
FEATURES.....	1
CONFIGURATIONS .....	1
SPECIFICATIONS.....	2
RELATED DOCUMENTS .....	3
<b>SECTION 2. INSTALLATION</b> .....	<b>5</b>
PIN LIST AND CONNECTORS .....	5
MOUNTING.....	5
CARD INSERTION AND ORIENTATION.....	7
TIMING FOR BACK SENSOR AND CARD PRESENT.....	8
TIMING FOR DATA AND STROBE.....	9
Card Present.....	9
Data .....	9
Strobe .....	9
<b>APPENDIX A. BEZEL DESIGN</b> .....	<b>11</b>

### FIGURES

Figure 1-1. MT-215 TTL Single Head Insertion Reader with Bezels .....	vi
Figure 2-1. MagTek Bezel Mounting Dimensions.....	6
Figure 2-2. Card Insertion and Orientation .....	7
Figure 2-3. Timing for Back Sensor and Card Present signals .....	8
Figure 2-4. Timing for Card Present, Data, and Strobe.....	9
Figure A-1. Dimensions for Bezel Design Sheet 1.....	12
Figure A-2. Dimensions for Bezel Design Sheet 2.....	13

### TABLES

Table 1-1. Configurations .....	1
Table 1-2. Specifications.....	2
Table 2-1. J3 Pin List.....	5

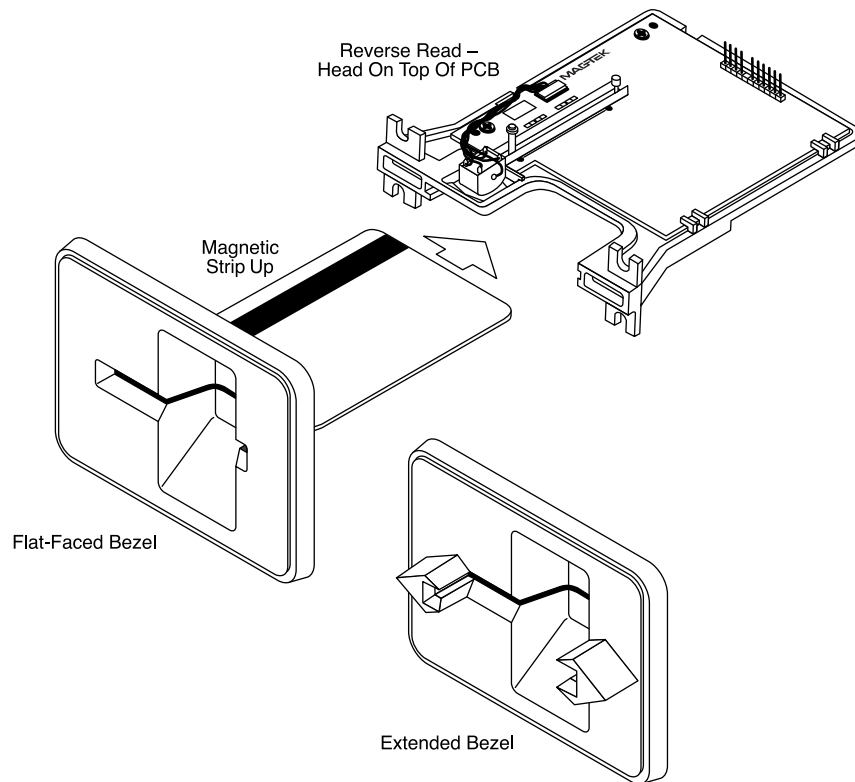

**Figure 1-1. MT-215 TTL Single Head Insertion Reader with Bezels**

# SECTION 1. FEATURES AND SPECIFICATIONS

The MT-215, TTL, Single Head Insertion Reader is a manually operated, or push-in, Reader, which reads three tracks. As shown in Figure 1-1, there are three configurations of the Reader: without bezel, with extended bezel, and with flat-faced bezel. The single read head is mounted on top of the Reader (the same side as the connector) as shown in the illustration. The magnetic card can be read on insertion or removal; MagTek recommends reverse read (the start sentinel is read last) on withdrawal for greater accuracy.

The Reader will read cards conforming to the following specifications: ISO (International Standards Organization), ANSI (American National Standards Institute), AAMVA (American Association of American Motor Vehicle Administrators), and CDL (California Drivers License).

## FEATURES

Features of the Reader are as follows:

- Single Read Head - Reads all three tracks in reverse read.
- Open Chassis design - provides superior debris clearing capability.
- Half-card Drop out - allows half-sized credit cards to clear from insert channel.
- Isolated PCB - isolates electronics from debris and liquids.
- AGC (Automatic Gain Control) in MagTek's latest F/2F decoder IC - enhances read performance with less susceptibility to RF interference.
- Beam-mounted Read-head - improves card-tracking capabilities.
- Ruggedized Chassis and Bezel Material - improves temperature and impact performance.

## CONFIGURATIONS

Table 1-1 lists the configurations.

**Table 1-1. Configurations**

<b>Part Number</b>	<b>Bezel</b>
21065120	None
21065121	Flat-faced
21065122	Extended

**SPECIFICATIONS**

The specifications for the Reader are listed in Table 1-2.

**Table 1-2. Specifications**

<b>OPERATING</b>	
Read-data Format Specifications Supported	ANSI/ISO/AAMVA/CDL/ 75 or 210 BPI on Track 1 (normally 210 BPI) ANSI/ISO/AAMVA/CDL/ 75 or 210 BPI on Track 2 (normally 75 BPI) ANSI/ISO/AAMVA/CDL/ 75 or 210 BPI on Track 3 (normally 210 BPI)
Power Requirements	Two Tracks: +5 VDC $\pm 5\%$ at 15mA Three Tracks: +5VDC $\pm 5\%$ at 20mA
Power Consumption	0.095 to 0.105 WATTS
Output Signal Levels	$V_{ol} = 0.4 \text{ V @ } 2.0 \text{ mA}$ $V_{oh} = V_{cc} - 0.5 \text{ V @ } 2.0 \text{ mA}$
Recording Method	Two-frequency coherent phase (F2F)
Speed	Card Speed: 3 to 50 IPS @ 75 or 210 BPI (7.6 to 127 cm/s) TRK 1 or 3: 75 or 210 BPI (MagTek decode ASIC is density independent). TRK 2: 75 or 210 (MagTek decode ASIC is density independent).
MTBF	Electronics: 125,000 hours Head: 1,000,000 passes (500,000 Insertion Cycles)
I/O Connector	11-pin Header, 0.100" centers, single in line.
<b>MECHANICAL</b>	
Dimensions (with Bezel)	Without bezel                      With Flat-faced Bezel                      With Extended Bezel
Length	4.40" (11.2cm)                      4.58" (11.63cm)                      5.09" (12.93cm)
Width	3.51" (8.92cm)                      4.00" (10.16cm)                      4.00" (10.16cm)
Height	1.24" (3.15cm)                      3.00" (7.62cm)                      3.00" (7.62cm)
Bezel Thickness	Flat Faced: 0.31" (0.79cm); Extended: 0.82" (2.08cm)
Weight	Without bezel                      With Flat-faced Bezel                      With Extended Bezel
	2.25 oz. (65 gr.)                      3.85 oz. (109 gr.)                      4.02 oz.. (114 gr.)
<b>ENVIRONMENTAL</b>	
Temperature	
Operating	-30°C to 70°C (-26°F to 158°F)
Storage	-40°C to 80°C (-40°F to 176°F)
Humidity	
Operating	10% to 90% noncondensing
Storage	Up to 100% noncondensing
Altitude	
Operating	0-10,000 ft. (0-3,048 m.)
Storage	0-50,000 ft. (0-15,240 m.)

**RELATED DOCUMENTS**

The MT-215 will read cards that meet the standards defined by ISO (International Standards Organization):

ISO 7811	Identification Cards - Mag-stripe Cards, Tracks 1-3
ISO 7810	Identification Cards - Physical Specifications (ID-1 Cards)

Available from ANSI:

Phone: 212-642-4900 or [www.ansi.org](http://www.ansi.org)

For further information about magnetic stripe readers, refer to MagTek part number 99875148, *I/O Interface for TTL Magnetic Stripe Readers, Technical Reference Manual*.



## SECTION 2. INSTALLATION

This section describes cabling information, mounting dimensions and timing.

### PIN LIST AND CONNECTORS

Table 2-1 lists the connector pins and the required mating Connector.

**Table 2-1. J3 Pin List**

Pin Number	TK 1, 2, 3
1	Back Sensor
2	Data TK 2
3	Card Present
4	Strobe TK 2
5	Key
6	+5V
7	GND
8	Strobe TK 1
9	Data TK 1
10	Strobe TK 3
11	Data TK3

Mating Connector\*: Molex 22-01-2111

\*Molex Terminals 08-50-0114

\*Molex Key 15-04-9209



### MOUNTING

Figure 2-1 shows the dimensions for mounting when using a flat-faced bezel. The top view shows J1 and J3 connectors and pin 1 for both.

#### *Note*

*For users who are interested in designing their own bezel, please refer to the dimensions provided in Appendix A.*


**MT-215 TTL Single Head, 3-Track, Insertion Reader**

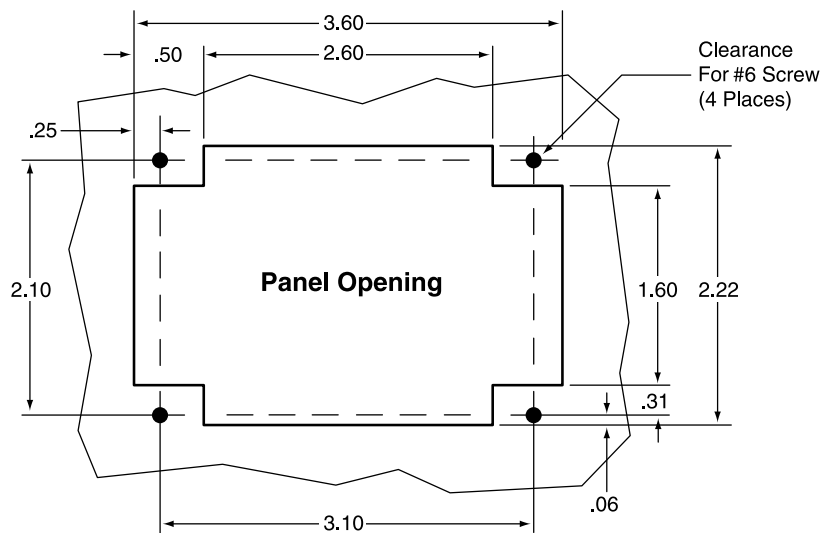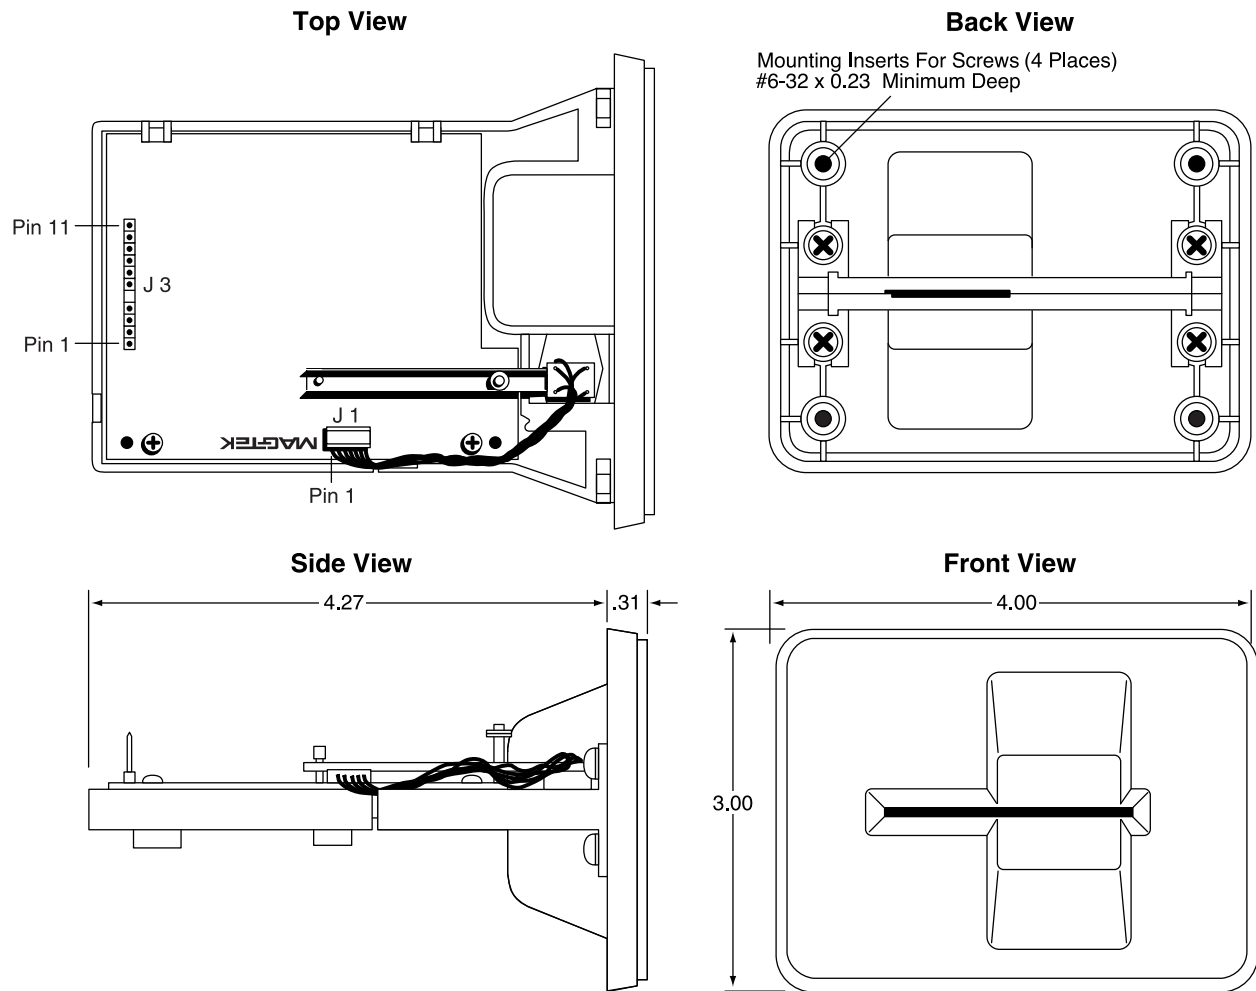

**Figure 2-1. MagTek Bezel Mounting Dimensions**

## CARD INSERTION AND ORIENTATION


The Reader can be mounted in the positions shown in Figure 2-2. On the left panel of the illustration, the card is inserted with the magnetic stripe up. On the right panel of the illustration, the Reader is rotated 90° clockwise, and the card is inserted with the magnetic stripe to the right. These are the mounting positions that permit any foreign object inserted into the slot to drop out of the reader. The head is always mounted on the same side as the PCB. For reverse read, the Start Sentinel is read last. See MagTek document *I/O Interface for TTL Magnetic Stripe Readers, Technical Reference Manual*, part number 99875148. For Reverse Read, the Start Sentinel is read last. For more information, see *I/O Interface for TTL Magnetic Stripe Readers, Technical Reference Manual, P/N 99875148*.

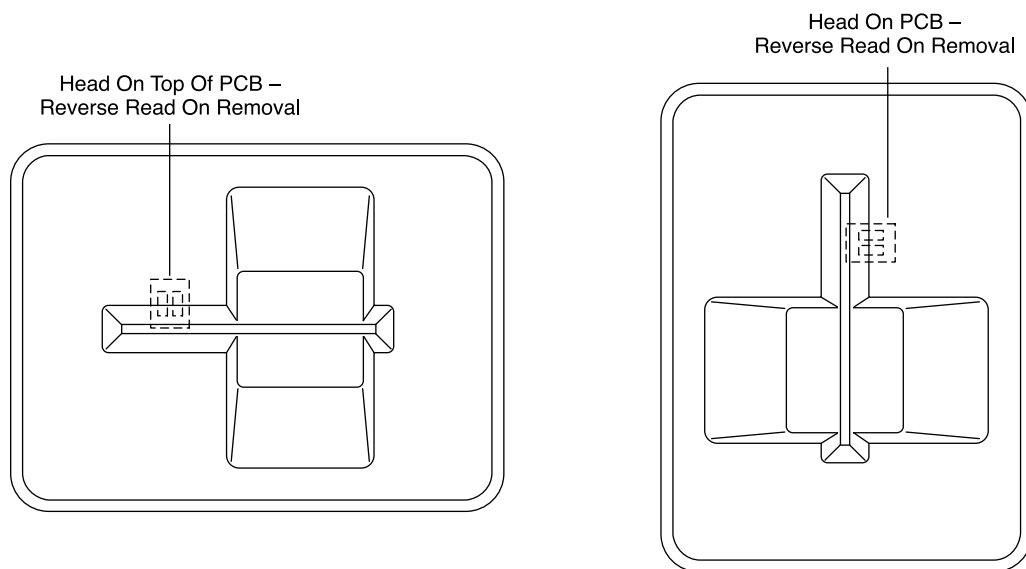

**Figure 2-2. Card Insertion and Orientation**

## TIMING FOR BACK SENSOR AND CARD PRESENT

Figure 2-3 shows the timing for the Back Sensor and the Card Present signals.

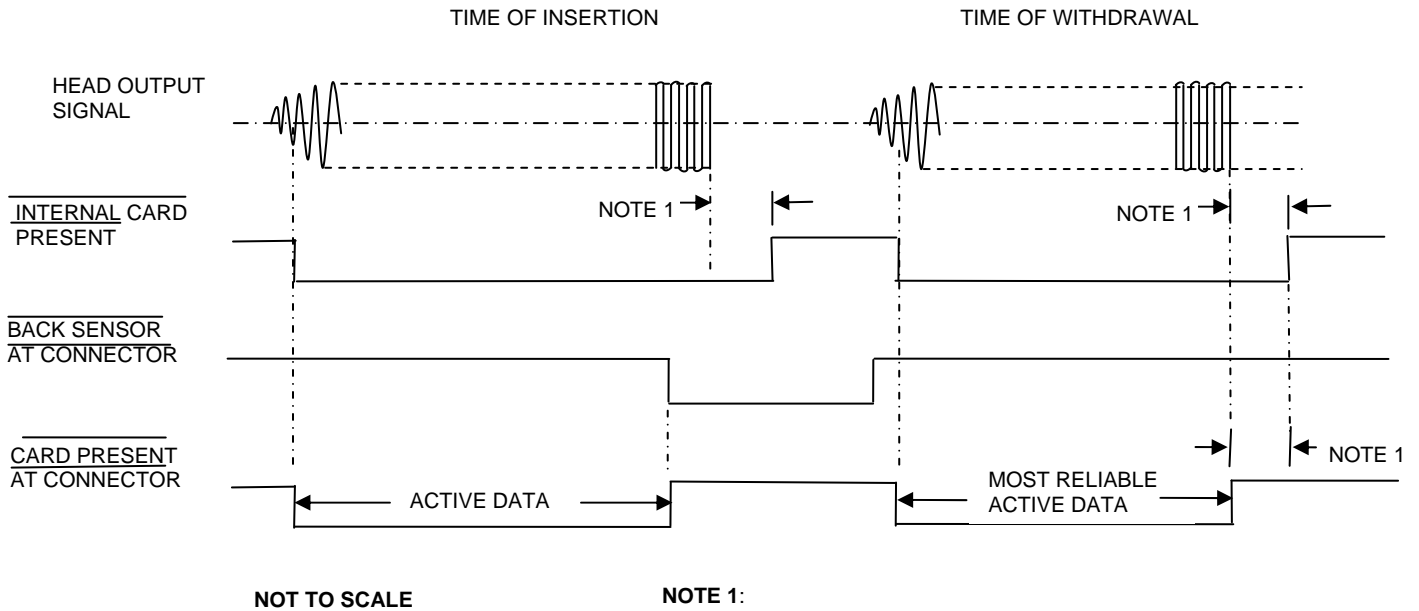


**Figure 2-3. Timing for Back Sensor and Card Present signals**

While it is possible for the Card Reader to read data on either the insertion or withdrawal stroke, it should be noted that card reading is most reliable during the card withdrawal stroke. For this reason MagTek recommends that customer's software should be designed to emphasize data capture during the card withdrawal stroke. For the most reliable operation: Read the card upon insertion, when the card present goes high, check for errors, if no errors, output the data, start sentinel first, after the card is withdrawn. If an error is detected, clear the stored data and read the card on withdrawal, if no errors, output the data, start sentinel first, otherwise output an error indication or a try again message.

## TIMING FOR DATA AND STROBE

Figure 2-4 shows the timing when a card is inserted or withdrawn.

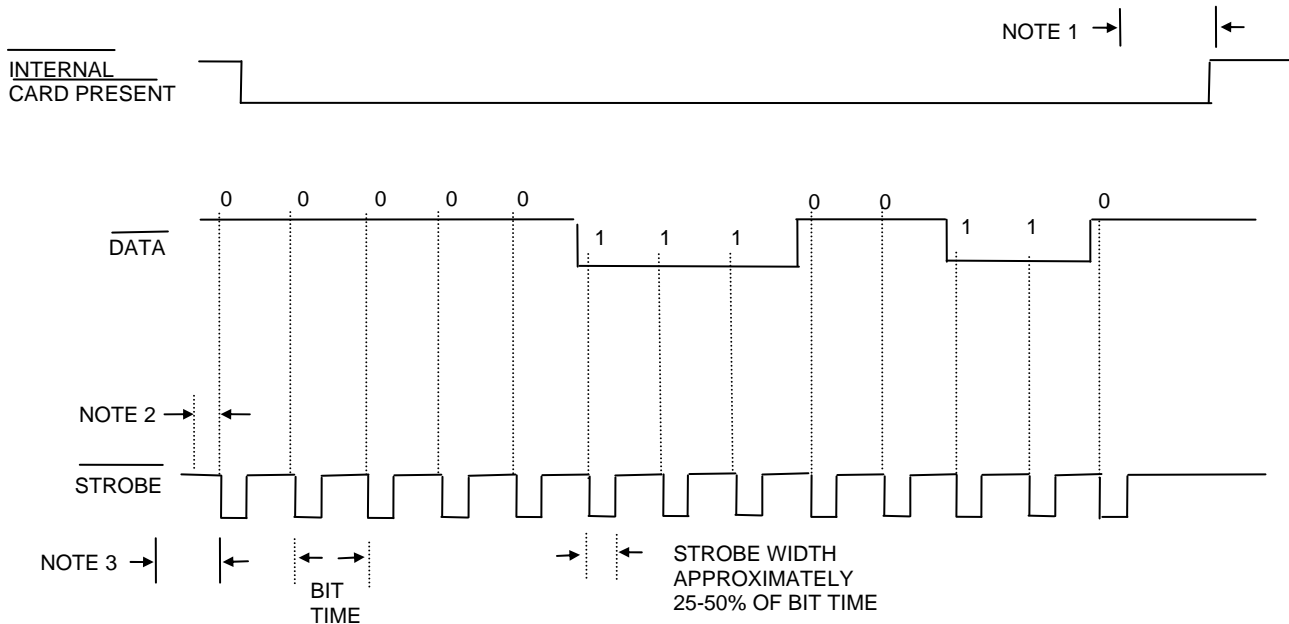

### NOTES

1. TIME OUT OF THE CARD PRESENT SIGNAL OCCURS APPROXIMATELY 150 MS AFTER THE LAST STROBE TRANSITION.
2. DATA IS VALID 1.0 μS (MINIMUM) BEFORE THE NEGATIVE EDGE OF STROBE.
3. 6 OR 7 HEAD FLUX REVERSALS ARE IGNORED FOR LOW DENSITY CONFIGURATION AND 14 OR 15 FOR HIGH DENSITY CONFIGURATION.

**Figure 2-4. Timing for Card Present, Data, and Strobe**

### Card Present

The Card Present signal is low when a recorded card is being moved across the read head. The Card Present signal is gated with the back sensor to ensure that Card Present will go high when the card is fully inserted into the Reader.

### Data

The Data signal is valid while the Strobe is low. If the Data signal is high, the bit is a zero.

### Strobe

The Strobe signal indicates when Data is valid. It is recommended that Data be loaded by the user with the leading edge (negative) of the Strobe.




## **APPENDIX A. BEZEL DESIGN**

The engineering drawing in this section is for customers interested in designing their own bezel. The example shown is a typical design from MagTek.

Please note that the bezel is an active part of the Reader; therefore the bezel design is important for card alignment and the performance of the Reader.

**MT-215 TTL Single Head, 3-Track, Insertion Reader**

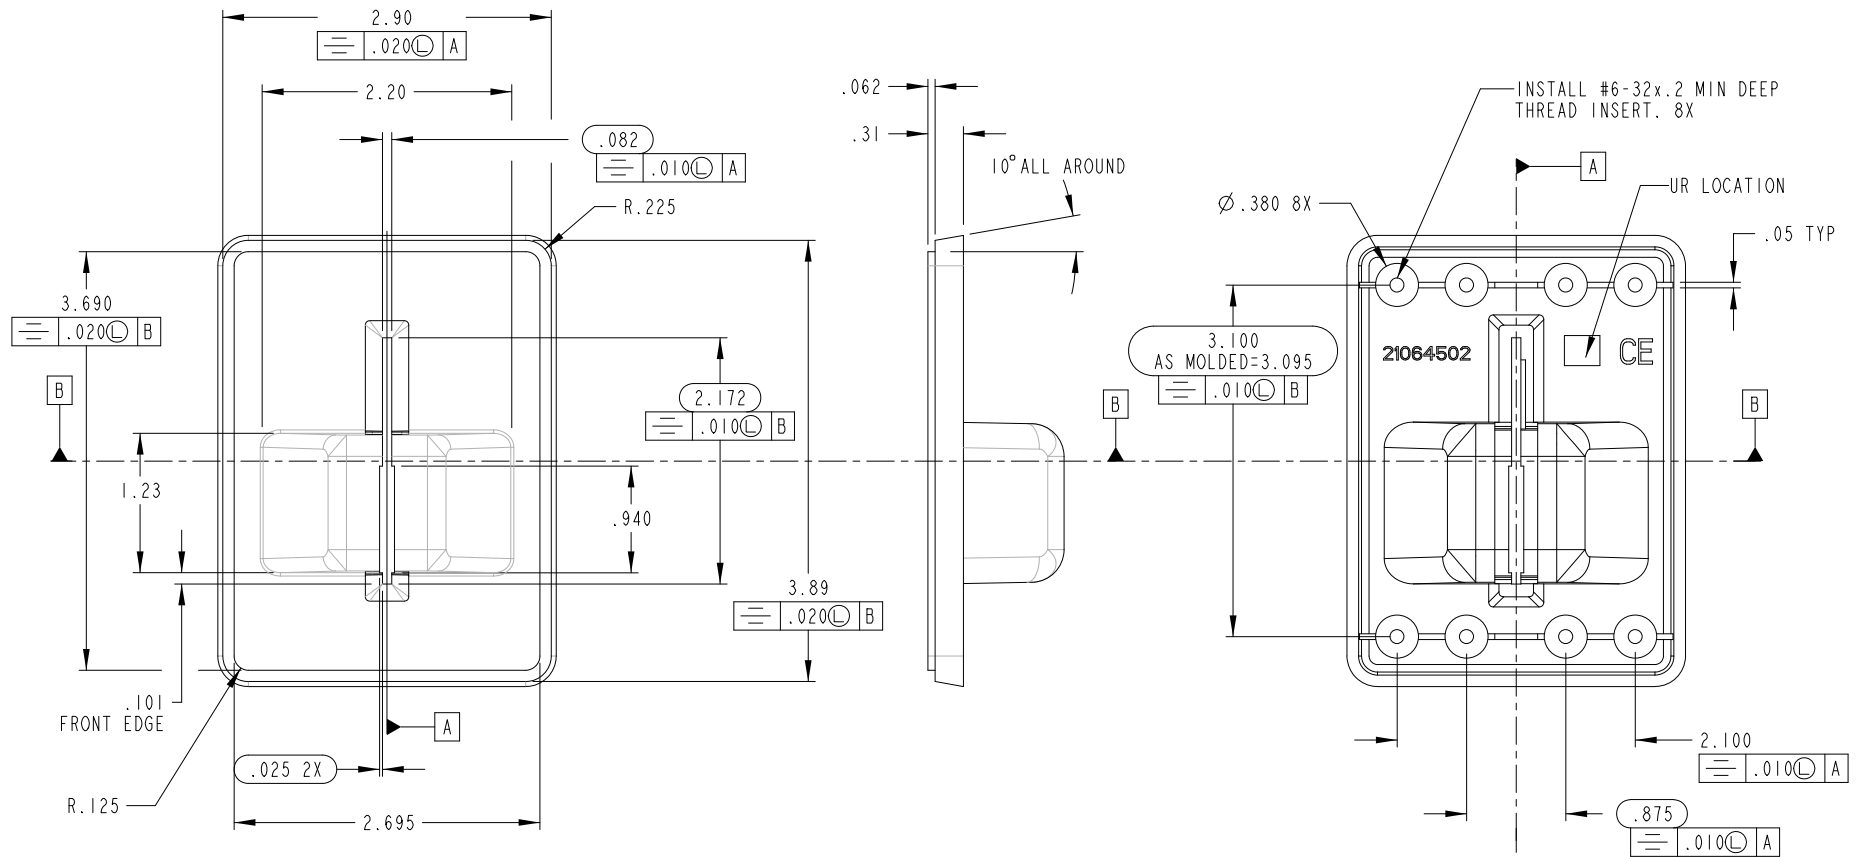

**Figure A-1. Dimensions for Bezel Design Sheet 1**

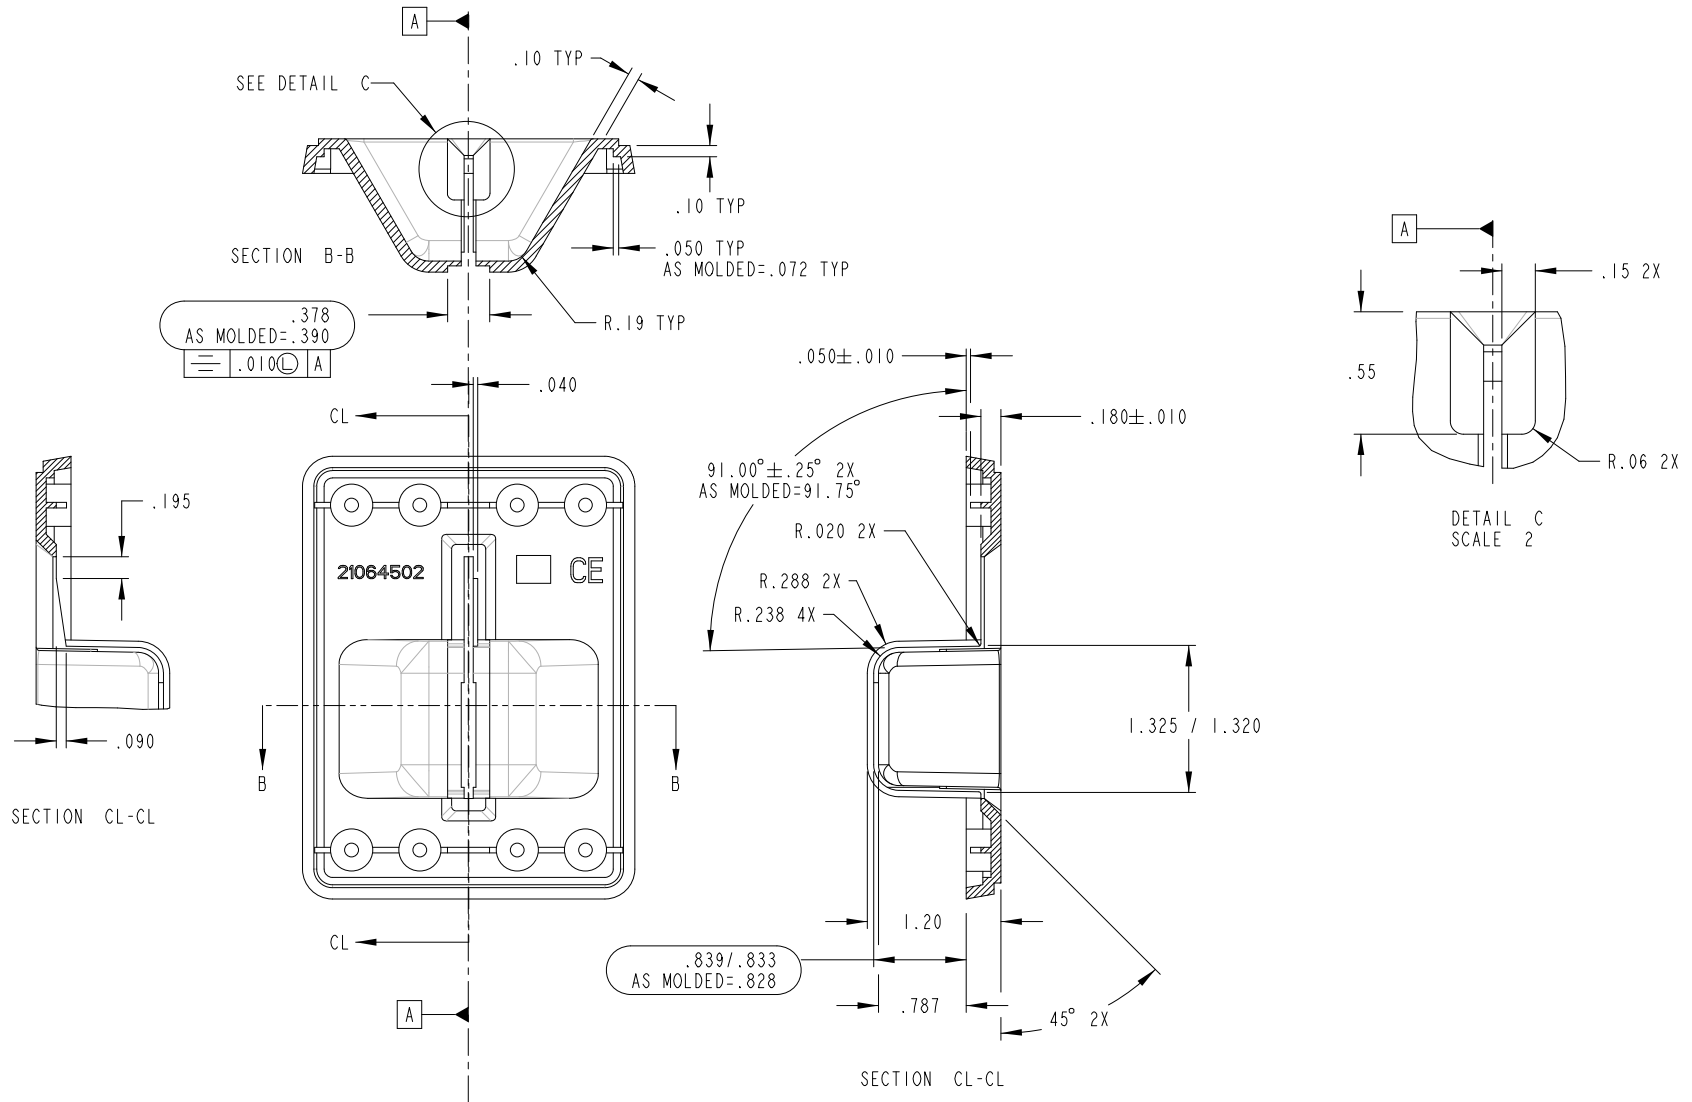


Figure A-2. Dimensions for Bezel Design Sheet 2

